


İki Katlı Ray Klemensleri Double-Deck Terminals

PIK 4 N

Kalınlık / Width 6 mm
319 109 GRI / GREY

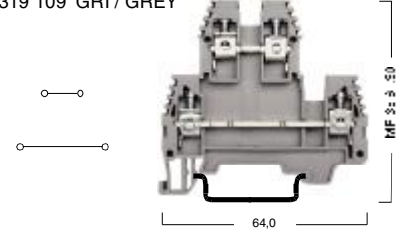


Klemsan iki katlı ray klemensleri, kablo bağlantısı yapmanın zor olduğu dar yerlerde en iyi bağlantı çözümünü sunmaktadır. Bu özelliğinin yanısıra aşağıdaki avantajlara da sahiptir.

- Montaj rayını büyütmeden, bağlantı sayısını iki misline çıkarır,
- Her iki katta da köprüleme imkanı mevcuttur,
- Her iki katta da kodlamaya uygun bir yapıya sahiptir.

Klemsan double level terminals are the answer to high wiring density problems posed by certain unavoidable wiring arrangements. Besides this, double level terminals have the following advantages:

- Double wiring density available without extension of mounting rails.
- Interconnection / shorting can be done at both levels.
- Marking / Identification by marking tags possible at both levels.

Renkler Colors	Klemensler Terminals	Nihayet Plakaları End Plate
	Sip.No./Cat.No.	Sip.No./Cat.No.
	PIK 4 N	NPP
BEJ - BEIGE	319 100	449 010
MAVİ-BLUE	319 101	449 011
GRI - GREY	319 109	449 019
	PIK 4 NK	NPP
BEJ - BEIGE	319 120	449 010
MAVİ-BLUE	319 121	449 011
GRI - GREY	319 129	449 019
	PIK 4 ND	NPP
BEJ - BEIGE	319 210	449 010
MAVİ-BLUE	319 211	449 011
GRI - GREY	319 219	449 019
	PIK 4 NLD	NPP
BEJ - BEIGE0	449 010
MAVİ-BLUE1	449 011
GRI - GREY9	449 019

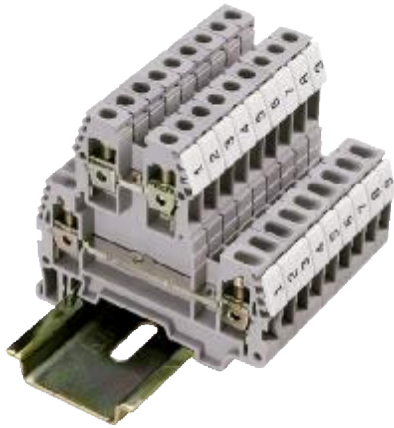

Anma Değerleri / Electrical Ratings

TSE / CE (EN 60947-7-1)
UL / CSA

Kablo Soyma Boyu / Insulation Stripping Length

Sıkma Torku / Torque: 0,5 Nm

Bağlantı Bilgileri / Connection Data

Tek İletken, Vida Bağlantılı / Solid Strand, Screw Connection
Çoklu İletken, Vida Bağlantılı / Fine Strand, Screw Connection
AWG İletken / AWG Conductor

Gerilim/Akım/Kesit / Voltage/Current/Cross-section

500 V - / 32 A / 4 mm²
300 V - / 30 A / AWG 26-10

9 mm

Sipariş Bilgileri / Ordering Data

Polyamide 6.6

GRI - GREY
GRI - GREY
GRI - GREY
GRI - GREY

Tip/Type Sip.No./Cat.No. Mik./Qty.


PIK 4 N 319 109 100

Elektriksel Özellikler / Electrical Ratings

Diod Ters Gerilimi / Diode Reverse Voltage
Diod Akımı / Diode Current
Diod / Diode

Montaj Rayları / Mounting Rail

MR 35x7,5 MR 35x15
MR 35x7,5 Delikli / Slotted MR 35x15 Delikli / Slotted



Tip/Type Sip.No./Cat.No. Mik./Qty.

MR 35x7,5 500 601 1 m
Delikli / Slotted 500 602 1 m
MR 35x7,5 500 603 2 m
Delikli / Slotted 500 604 2 m
MR 35x7,5 500 605 30 mm
MR 35x15 500 606 1 m
Delikli / Slotted 500 607 1 m

Durdurucu / End Bracket



MR 35 için/For GRI - GREY
MR 35 için/For GRI - GREY

Tip/Type Sip.No./Cat.No. Mik./Qty.

KD 3 495 049 100
KD 4 495 059 100

Nihayet Plakası / End Plate

Kalınlık / Thickness 1.5 mm
Polyamide 6.6

NPP

Tip/Type Sip.No./Cat.No. Mik./Qty.

NPP PIK 2.5-4 N 449 019 25

Üst Köprü / Cross - Connection



Tip/Type Sip.No./Cat.No. Mik./Qty.

UK 2.5/2 474 122 25
UK 2.5/3 474 123 20
UK 2.5/4 474 124 15
UK 2.5/10 474 129 5

Test Fişi / Test Plug and Socket



Tip/Type Sip.No./Cat.No. Mik./Qty.

TF (Ø 2) 493 020 5
TF (Ø 2.3) 493 023 5
TSK 1 (Ø 2) 490 010 5
TSK 3 (Ø 2.3) 490 030 5

Grup Etiket / Group Marking



BEJ / BEIGE
GRI / GREY
GRI / GREY

Tip/Type Sip.No./Cat.No. Mik./Qty.

GE 496 110 50
GE 496 119 50
ME 496 139 25

Klemens Etiket / Marking Tags (Dekafix)

Dekafix kullanımı için 62. sayfaya bakınız.
See page 62. for the usage of dekafix.

DY 5 DB 10/5 DB 10/6 DG 6/5 DG 10/5 DG 10/6