YBK 4-2F-Serisi ray klemensleri kablo bağlantısı yapmanın zor olduğu dar yerlerde en iyi bağlantı çözümünü sunmaktadır. Bu özelliğinin yanısıra aşağıdaki avantajlara da sahiptir.
• Montaj rayını büyütmeden, bağlantı sayısını iki misline çıkartır,
• Her iki katta da köprüleme imkanı mevcuttur,
• Her iki katta da kodlamaya uygun bir yapıya sahiptir.

Double deck spring clamp terminals are the answer to high wiring density problems posed by certain unavoidable wiring arrangements. Besides this, double level terminals have the following advantages:
• Double wiring density available without extension of mounting rails.
• Interconnection / shorting can be done at both levels.
• Marking / Identification by marking tags possible at both levels.

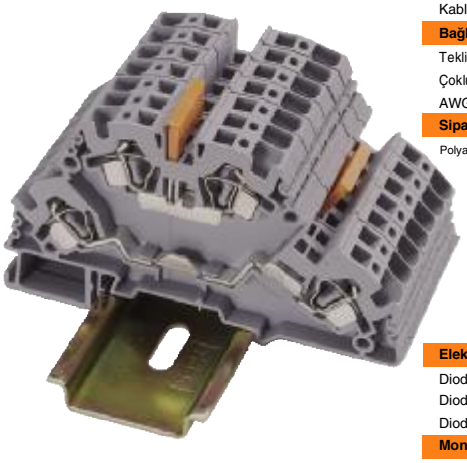

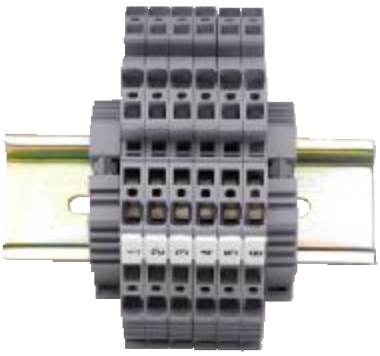

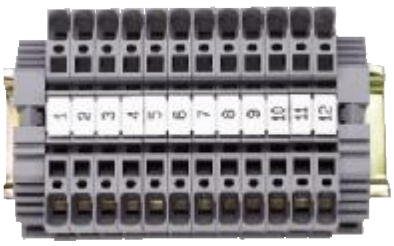

İki Katlı Yay Baskılı Ray Klemensleri
Double Deck Spring Clamp Terminals

YBK 4-2F
Kalınlık / Width 6 mm
318 109 GRİ / GREY

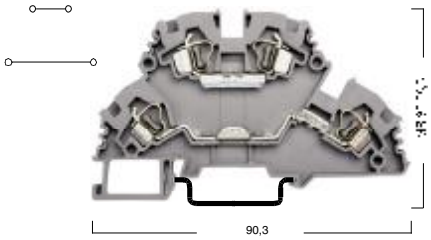

Anma Değerleri / Electrical Ratings		Gerilim/Akım/Kesit / Voltage/Current/Cross-section		
TSE / CE (EN 60947-7-1)		750 V ~ / 30 A / 4 mm²		
UL / UL		600 V ~ / 26 A / AWG 22-10		
Kablo Soyma Boyu / Insulation Stripping Length		12 mm		
Bağlantı Bilgileri / Connection Data				
Tekli İletken, Yay Baskılı / Solid Strand, Clamp Connection		0,5 - 6 mm²		
Çoklu İletken, Yay Baskılı / Fine Strand, Clamp Connection		0,5 - 4 mm²		
AWG İletken / AWG Conductor		22....10		
Sipariş Bilgileri / Ordering Data		Tip/Type	Sip.No./Cat.No.	Mik./Qty.
Polyamide 6.6	BEJ - BEIGE / GRİ - GREY	YBK 4-2F	**318 100 / 318 109**	**50**
	BEJ - BEIGE / GRİ - GREY			
	BEJ - BEIGE / GRİ - GREY			
	BEJ - BEIGE / GRİ - GREY			
	BEJ - BEIGE / GRİ - GREY			
	BEJ - BEIGE / GRİ - GREY			
	BEJ - BEIGE / GRİ - GREY			
	BEJ - BEIGE / GRİ - GREY			
Elektriksel Özellikler / Electrical Ratings				
Diod Ters Gerilimi / Diode Reverse Voltage				
Diod Akımı / Diode Current				
Diod / Diode				
Montaj Rayları / Mounting Rail		Tip/Type	Sip.No./Cat.No.	Mik./Qty.
MR 35x7,5		MR 35x7.5	**500 601**	1 m
MR 35x7,5 Delikli / Slotted		Delikli / Slotted	**500 602**	1 m
MR 35x7.5		MR 35x7.5	**500 603**	2 m
Delikli / Slotted		Delikli / Slotted	**500 604**	2 m
MR 35x7.5		MR 35x7.5	**500 605**	30 cm
MR 35x15		MR 35x15	**500 606**	1 m
MR 35x15 Delikli / Slotted		Delikli / Slotted	**500 607**	1 m
Durdurucu / End Bracket		Tip/Type	Sip.No./Cat.No.	Mik./Qty.
Kalınlık / Thickness 8 mm	GRİ / GREY	KD 3	**495 049**	100
	GRİ / GREY	KD 4	**495 059**	100
Nihayet Plakası / End Plate		Tip/Type	Sip.No./Cat.No.	Mik./Qty.
Kalınlık / Thickness 1.5 mm Polyamide 6.6	BEJ / BEIGE	NPP YBK 4-2F	**446 260**	25
	GRİ / GREY	NPP YBK 4-2F	**446 269**	25
Üst Köprü / Cross - Connection		Tip/Type	Sip.No./Cat.No.	Mik./Qty.
		UK 4/2	**476 232**	25
		UK 4/3	**476 233**	20
		UK 4/4	**476 234**	15
		UK 4/10	**476 239**	5
Test Fişi / Test Plug		Tip/Type	Sip.No./Cat.No.	Mik./Qty.
		TF (Ø2)	**493 020**	5
Grup Etiketi / Group Marking		Tip/Type	Sip.No./Cat.No.	Mik./Qty.
	GRİ / GREY	GE	**496 119**	50
	GRİ / GREY	ME	**496 139**	25
Klemens Etiketu / Marking Tags (Dekafix)				
Dekafix kullanımı için 62. sayfaya bakınız.		DY 5 DB 10/5 DB 10/6 DG 6/5 DG 10/5 DG 10/6		
See page 62. for the usage of dekafix.				

PDF created with pdfFactory Pro trial version www.pdffactory.com