

Yaylı Tip Sigortalı ve Baralı Klemensler

Spring Clamp Fuse and Disconnect Terminals

Klemensler, Ø5x20 veya Ø5x25 cam sigorta takılabilen ve yedek sigorta yuvası bulunan bir kartaşa sahiptir. Endüstride standartlaşmış 5x20 - 5x25 sigortalar ve baralar ile özellikle ABD'de kullanılan 6.35 mm. x 31.75 mm. (1/4" x 1 1/4") sigorta ve baralar için tasarlanmıştır.

The terminal has a moving type hinged carrier that has a specially designed space for cartridge type glass fuse of size Ø5x20 or Ø5x25 together with a spare one. Spring clamp fuse and disconnect terminals are designed to be used with 5x20 - 5x25 fuses and busbars as an industrial standard and 6.35 mm. x 31.75 mm. (1/4" x 1 1/4") fuses and busbars as an American standard.




Anma Değerleri / Electrical Ratings

TSE / CE (EN 60947-7-3)
UL / CSA

Kablo Soyma Boyu / Insulation Stripping Length

YBK I

Kalınlık / Width 8 mm
355 129
GRI / GREY



Anma Değerleri / Electrical Ratings	Genilim / Akım / Kesit / Voltage/Current/Cross-section
TSE / CE (EN 60947-7-3)	500 V - / 10 A / 4 mm ²
UL / CSA	600 V - / 10 A / AWG 22-10


Kablo Soyma Boyu / Insulation Stripping Length	12 mm
------------------------------------------------	-------

Bağlantı Bilgileri / Connection Data

Tekli İletken, Yay Baskılı / Solid Strand, Clamp Connection	0,5 6 mm ²
Çoklu İletken, Yay Baskılı / Fine Strand, Clamp Connection	0,5 4 mm ²
AWG İletken / AWG Conductor	22 10

Sipariş Bilgileri / Ordering Data

Sipariş Bilgileri / Ordering Data	Tip/Type	Sip.No./Cat.No.	Mik./Qty.
Polyamide 6.6	YBK I	355 120 / 355 129	20
BEJ - BEIGE / GRI - GREY			
BEJ - BEIGE / GRI - GREY			
BEJ - BEIGE / GRI - GREY			
BEJ - BEIGE / GRI - GREY			
BEJ - BEIGE / GRI - GREY			
BEJ - BEIGE / GRI - GREY			
BEJ - BEIGE / GRI - GREY			
BEJ - BEIGE / GRI - GREY			
BEJ - BEIGE / GRI - GREY			

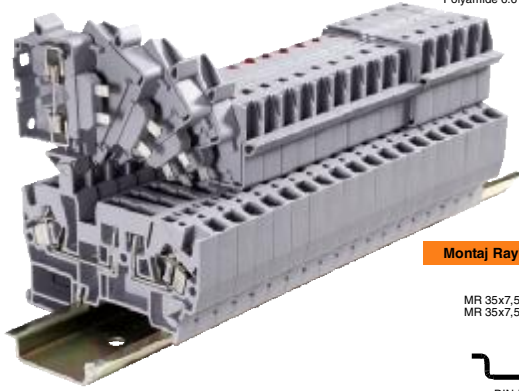

Montaj Rayları / Mounting Rails

Montaj Rayları / Mounting Rails	Tip/Type	Sip.No./Cat.No.	Mik./Qty.
MR 35x7.5 MR 35x7.5 Delikli / Slotted	MR 35x7.5	500 601	1 m
MR 35x15 MR 35x15 Delikli / Slotted	Delikli / Slotted	500 602	1 m
	MR 35x7.5	500 603	2 m
	Delikli / Slotted	500 604	2 m
	MR 35x7.5	500 605	30 cm
	MR 35x15	500 606	1 m
	Delikli / Slotted	500 607	1 m

Durdurucu / End Bracket

Durdurucu / End Bracket	Tip/Type	Sip.No./Cat.No.	Mik./Qty.
Kalınlık / Thickness 8 mm	KD 3	495 049	100
	KD 4	495 059	100

Nihayet Plakası / End Plate

Nihayet Plakası / End Plate	Tip/Type	Sip.No./Cat.No.	Mik./Qty.
Kalınlık / Thickness 1.5 mm. Polyamide 6.6	NPP YBK S - YBK I	450 060	10
	NPP YBK S - YBK I	450 069	10

Üst Köprü / Cross - Connection

Üst Köprü / Cross - Connection	Tip/Type	Sip.No./Cat.No.	Mik./Qty.
	UK 6/2	476 242	25
	UK 6/3	476 243	20
	UK 6/4	476 244	15
	UK 6/10	476 249	5

Sigorta Buşonu / Fuse Cartridges

Sigorta Buşonu / Fuse Cartridges	Tip/Type	Sip.No./Cat.No.	Mik./Qty.
5 x 20 mm.	MSB	359 001	10
5 x 25 mm.	MSB	359 002	10
1 10 A 6.35 x 31.75 mm.(1/4" x 1 1/4")	MSB	359 020	10

Grup Etiket / Group Marking

Grup Etiket / Group Marking	Tip/Type	Sip.No./Cat.No.	Mik./Qty.
	GE	496 119	50
	ME	496 139	25

Klemens Etiket / Marking Tags (Dekafix)

Klemens Etiket / Marking Tags (Dekafix)	Tip/Type	Sip.No./Cat.No.	Mik./Qty.
Dekafix kullanımı için 62. sayfaya bakınız. See page 62. for the usage of dekafix.	DY 5		