


Sıra Klemensler

Terminal Strips

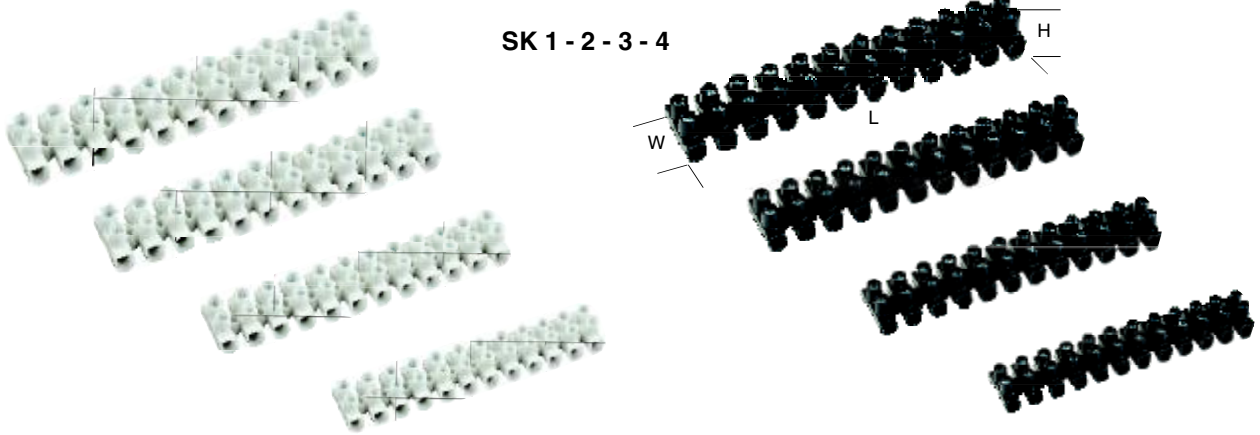

| Anma Değerleri / Electrical Ratings | Gerilim / Kesit / Voltage/Cross-section | | | | | | | | | | | |
|---|---|----------------------------------|----------------------------------|-----------------------------------|-----------------|-----------|----------|-----------------|-----------|----------|-----------------|-----------|
| IEC 60998-1, IEC 60998-2-1 (VDE) | 450 V / 24 A / 2,5 mm ² | 450 V / 32 A / 4 mm ² | 450 V / 41 A / 6 mm ² | 450 V / 76 A / 10 mm ² | | | | | | | | |
| UL / UL | 300 V / 20 A / AWG 22 - 12 | 300 V / 30 A / AWG 22 - 10 | 300 V / 50 A / AWG 14 - 8 | 300 V / 55 A / AWG 10 - 6 | | | | | | | | |
| | | | | | | | | | | | | |
| Bağlantı Bilgileri / Connection Data | | | | | | | | | | | | |
| Tekli İletken, Vida Bağlantılı / Solid Strand, Screw Connection | 0,75 - 2,5 mm ² | 0,75 - 4 mm ² | 0,75 - 6 mm ² | 0,75 - 10 mm ² | | | | | | | | |
| Çoklu İletken, Vida Bağlantılı / Fine Strand, Screw Connection | 1,5 - 1,5 mm ² | 1,5 - 2,5 mm ² | 1,5 - 4 mm ² | 1,5 - 6 mm ² | | | | | | | | |
| | | | | | | | | | | | | |
| Sipariş Bilgileri / Ordering Data | Tip/Type | Sip.No./Cat.No. | Mik./Qty. | Tip/Type | Sip.No./Cat.No. | Mik./Qty. | Tip/Type | Sip.No./Cat.No. | Mik./Qty. | Tip/Type | Sip.No./Cat.No. | Mik./Qty. |
| Siyah (Vida Blokajı, Pasivasyonu) Black (With Screw Blockage, Passivated) | SK 1 | 430 002 | 50 | SK 2 | 430 012 | 50 | SK 3 | 430 022 | 50 | SK 4 | 430 032 | 50 |
| Ebatlar Dimensions | L: 95 | W:16 | H:12,8 | L: 116 | W:19 | H:15 | L: 135 | W:22,5 | H:17,65 | L: 176 | W:25,3 | H:20,5 |
| Naturel (Vida Blokajı, Nikel Kaplı) White (With Screw Blockage, Ni Coated) | SK 1 | 431 002 | 50 | SK 2 | 431 012 | 50 | SK 3 | 431 022 | 50 | SK 4 | 431 032 | 50 |

Buat Klemensleri

Junction Box Terminals

- 1,5 - 2,5 mm² Kabloya uygun
- Yay baskılı bağlantı sistemi
- Tek noktadan test imkanı
- Sola döndürerek demontaj

- Suitable for 1,5 - 2,5 mm² cross-sections
- Cage clamp connection
- One-point test
- Disassembling by turning the cable left



| Anma Değerleri / Electrical Ratings | Gerilim / Akım / Kesi t / Voltage / Current / Cross-section | | | | | | | | |
|--------------------------------------|---|------------------------------------|------------------------------------|-------------|-----------------|-----------|-------------|-----------------|-----------|
| IEC 60998-1, IEC 60998-2-1 (VDE) | 450 V / 24 A / 2,5 mm ² | 450 V / 24 A / 2,5 mm ² | 450 V / 24 A / 2,5 mm ² | | | | | | |
| Boyutlar / Dimensions (a,b,c) | 9,4 - 19,4 - 13,8 | 9,4 - 19,4 - 17,6 | 9,4 - 19,4 - 21,1 | | | | | | |
| | | | | | | | | | |
| Bağlantı Bilgileri / Connection Data | | | | | | | | | |
| Tekli İletken / Solid Strand | 1,0 - 2,5 mm ² | 1,0 - 2,5 mm ² | 1,0 - 2,5 mm ² | | | | | | |
| | | | | | | | | | |
| Sipariş Bilgileri / Ordering Data | Tip/Type | Sip.No./Cat.No. | Mik./Qty. | Tip/Type | Sip.No./Cat.No. | Mik./Qty. | Tip/Type | Sip.No./Cat.No. | Mik./Qty. |
| | BUK 2,5 / 3 | 425 235 | 100 | BUK 2,5 / 4 | 425 245 | 100 | BUK 2,5 / 5 | 425 255 | 100 |